

AXXICON CHECK LIST FOR AIM INSERTS



www.axxicon.com

Axxicon Quotation Number Q _____
Revision Number _____

Company name _____
Country _____
Contact Person _____
Email _____

Date _____
Agent _____
Contact Person _____
Email _____

STANDARD INSERT (see 5.3 up to 5.6 of AIM Information Booklet)

If yes, please specify:

MODIFIED INSERT BASED ON A STANDARD INSERT (like different length or thickness etc.)

If yes, please specify required modifications:

CUSTOMIZED INSERT

Please specify required modifications

MOULD TEMPERATURE

- 10-100 °C (Low temperature - water / oil)
- 10-140 °C (Low temperature - water / oil)
- 140-250 °C (High temperature - water / oil)

MATERIALS

- Material: pls specify
- Filler : pls specify

TEXTURE *

- No
 - Yes:
- If yes: Please specify _____

LOGO *

- No
 - Yes
- If yes: Add logo _____

COATING *

- None
- Tin coating
- MCP coating

CHAIN HOLE *

- No
- Yes

CAVITY SPECIFICATIONS *

- Cavity number engraved
- Polishing quality

- Yes No
- N1 N2


NOTCHES *

- No
- Yes:
- _____

RUNNER SWITCH *

- No
- Yes
- ___ way valve

CUSTOM SKETCH

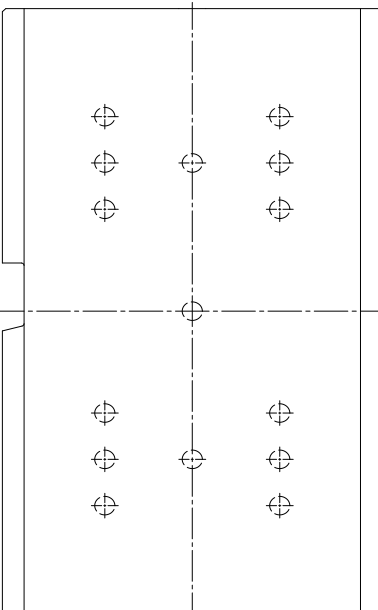

CAVITY SPECIFICATIONS *

- Roughness measurement
- Cavity measurement

- Yes No
- Yes No

** For add on prices, please refer to price list*

NOTE

Not all AIM parts will be tested. In case of testing, then a standard material will be used selected by Axxicon

Standard material PP or PE

REMARKS
